



**FIG. 1**

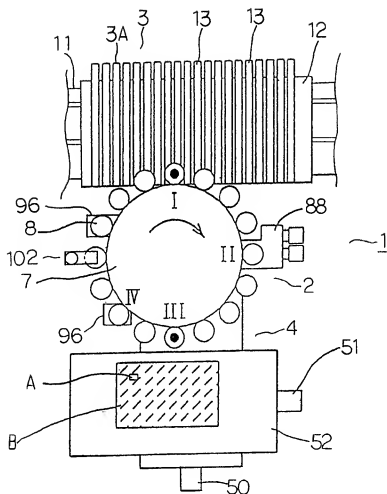


BEST AVAILABLE COPY

FIG. 2

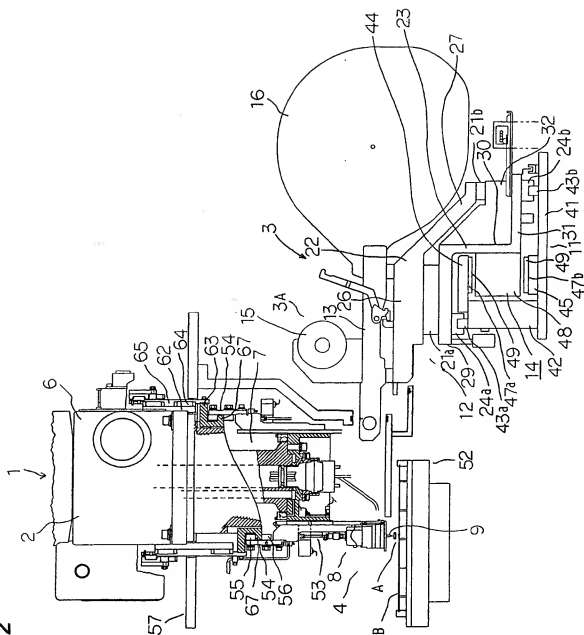


BEST AVAILABLE COPY

FIG.3

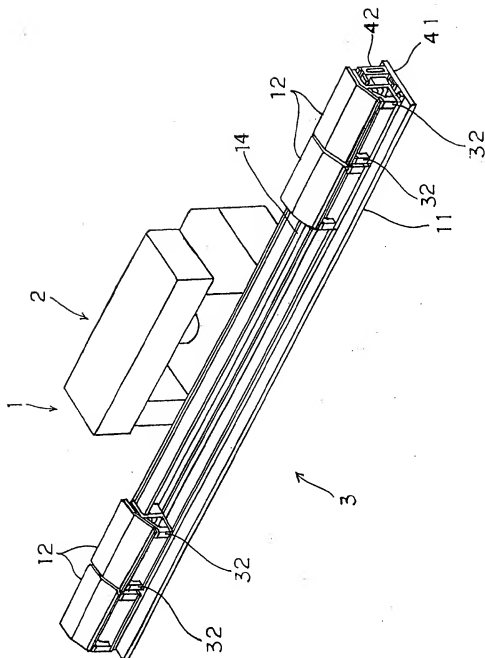


BEST AVAILABLE COPY

**FIG.4**

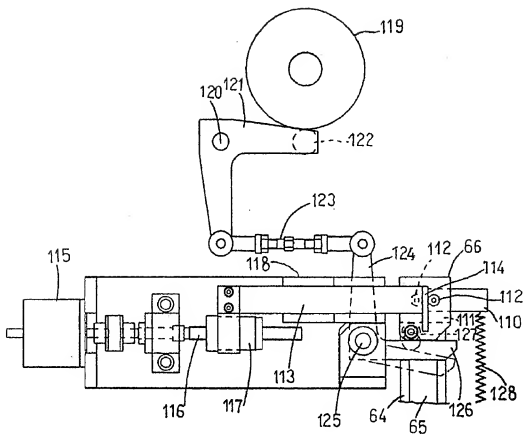


**BEST AVAILABLE COPY**

FIG. 5

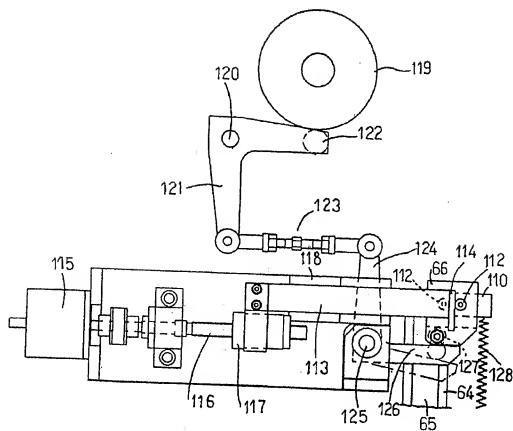


BEST AVAILABLE COPY

FIG. 6

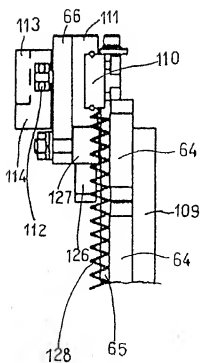

BEST AVAILABLE COPY

FIG. 7

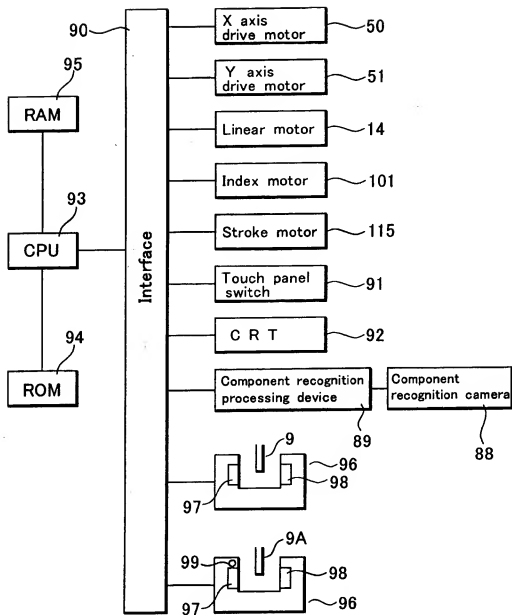


BEST AVAILABLE COPY

FIG.8

component thickness	: 0.6 mm
component X size	: 1.6 mm
component Y size	: 0.75 mm
Nozzle level	: 5.0 mm
Permissible value of component thickness	: 0.1 mm
Permissible value of component X size	: 0.1 mm
Permissible value of component Y size	: 0.1 mm
Permissible value of level	: 0.1 mm

FIG.9



BEST AVAILABLE COPY

FIG. 10





FIG. 11



BEST AVAILABLE COPY